


CYP2D6 Comprehensive Cascade Testing Algorithm*

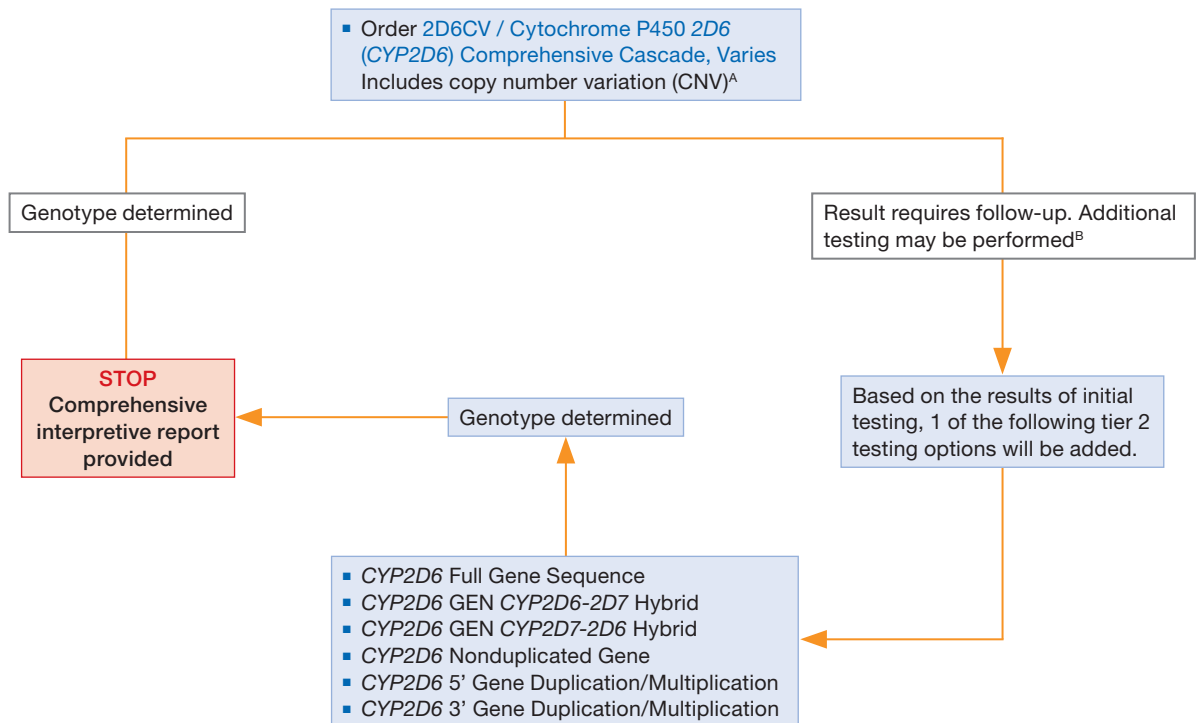

*Additional testing is performed to derive as accurate a phenotype as possible.

^AAlways performed

^BAdditional testing may be performed (only approximately 3% of individuals may need additional testing) for the following reasons:

1. No call on single nucleotide polymorphism
2. Single nucleotide polymorphism pattern does not fit known star allele
3. Duplication involving alleles with different levels of activity
4. Genotype/phenotype discord
5. Laboratory director request (CYP2D6 real time PCR and CNV assays must be completed first)
6. Ambiguous genotype leading to ambiguous phenotype.

^C Tier 2 testing: The number of sequencing tests needed to determine the phenotype will vary depending on the tier 1 result.